STRION LASER

Continuous Wave Laser Cleaning Machine



Temperature Control Module Alerts Lens Lifespan

High-Pressure Air Knife Design

Lens Lifespan Extended by 50%

Dual-Safety Laser Emission, Safe to Use

3000W Power, Efficient Cleaning

Industrial-grade quality with IP53

Self-developed intelligent control system
for stable and efficient performance

Item	MASTER X80 C	MASTER X60 C	MASTER X50 C
Rated Input Voltage(Hz)	Three Phase 380V 50/60		Single Phase 220V 50/60
Laser Power(W)	3000	2000	1500
Cooling Method	Dual-Circuit Refrigerant Direct Cooling		
Working Temperature(°C)	-30-60		
Dimension(mm)	987x470x774	912X420X722	
Weight(kg)	100	75	
Armored Cable Length (m)	10m as standard. 15m can be customized		

CLEANING TORCH PARAMETER

Applicable Power	≤3000W
Collimating Mirror	D16-F60
Focusing Mirror	D20*T3.5-(F400/F600/F800)
Protective Goggles	D30*T5
Air Flow Rate	≥15L/min
Focus Vertical Adjustment Range	±10mm
Weight	0.7Kg
Compatible Laser	The beam is collimated to φ≤10mm

APPLICATION CASES




Truck Bed Rust Removal



High-Strength Steel Frames Rrust Removal



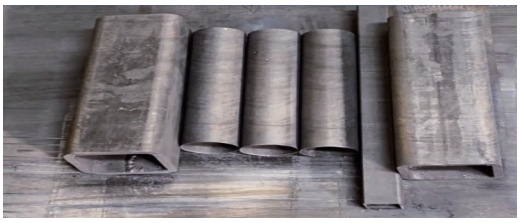





STRION LASER

Tel.: +86-28 85812068 Email: str@strlaser.com Web.: www.strlaser-en.com

Add: 302, Zone 11, HaoLang Science Park, Chengdu, Sichuan, China.

Legal Disclaimer: Sichuan STRION LASER Technology Co., Ltd. reserves the right to modify any information in this document at any time without prior notice and without liability. Product sales process, the information in this document is for reference only, the specific parameters please refer to the sales agreement.